



# CLYDESDALE BATTERIES

## CLY-875



## Applications

- Golf Carts
- Utility Vehicles
- Recreational Vehicles

## Certificates






CLYDESDALE BATTERY  
COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV  
= ISO 9001:2015 =

## Specification


Nominal Voltage	8 V
Nominal Capacity	165 Ah
Battery Type	Lead Acid Flooded
Terminal	Embedded low profile terminal
Approx Weight	Approx 28.1kg (62lbs)
Container Material	Polypropylene
Rated Capacity	<b>183 Ah</b> 100 Hour Rate <b>165 Ah</b> 20 Hour Rate <b>150 Ah</b> 10 Hour Rate <b>141 Ah</b> 5 Hour Rate
Reserve Capacity	<b>Reserve @ 56 AMPS</b> 112 Minutes
Operating Temperature	<b>Discharge</b> -20 ~ 45°C <b>Charge</b> -20 ~ 45°C (-4~ 122°F) <b>Storage</b> Recommended as close to 25°C as possible
Charge Method (25°C)	<b>Bulk Charge</b> 9.88V <b>Float Charge</b> 9.00V <b>Equalization Charge</b> 10.80 <b>Max Charge Current</b> 0.5C
Self Discharge	5 - 15% per month depending on storage temperature conditions

Dimension: 261 (L) x 180 (W) x 272 (H) Unit: mm

Terminal

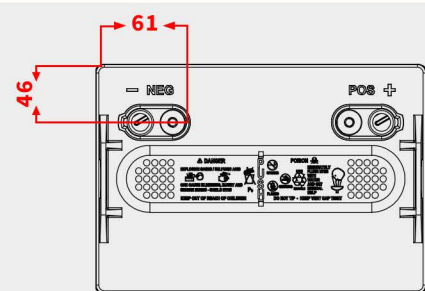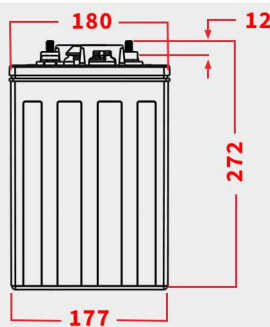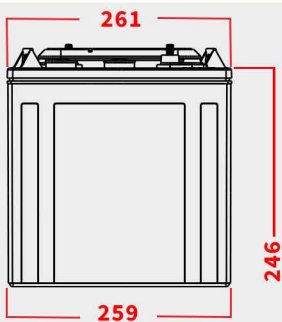

Performance

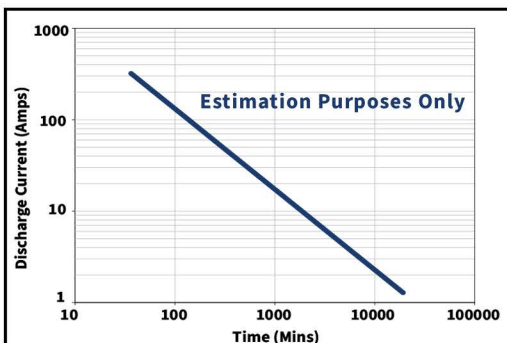

Percent  
Capacity

VS

Temperature

